

**ANALYSIS OF POSSIBILITY OF ADAPTATION
REGENERATION CONCEPT FOR ENGINE DRIVEN
EMPTY CONTAINER HANDLERS**

W. L. L. Wickramarachchi

(8432)

Degree of Master of Science

University of Moratuwa



102534

Department of Electrical Engineering

University of Moratuwa

Sri Lanka

December 2011

621.3 "11"
621.3(043)

TH

102534

102534

**ANALYSIS OF POSSIBILITY OF ADAPTATION
REGENERATION CONCEPT FOR ENGINE DRIVEN
EMPTY CONTAINER HANDLERS**

W. L. L. Wickramarachchi

(8432)

Dissertation submitted in partial fulfilment of the requirements for the

Degree of Master of Science

Department of Electrical Engineering

University of Moratuwa


Sri Lanka

December 2011

DECLARATION

I declare that this is my own work and this dissertation doesn't incorporate without acknowledgement any material previously submitted for a Degree or Diploma in any other University or institute of higher learning and to the best of my knowledge and belief it doesn't contain any material previously published or written by another person except where the acknowledgement is made in the text.

Also, I hereby grant to University of Moratuwa the non-exclusive right to reproduce and distribute my dissertation, in whole or in part in print, electronic or other medium. I retain the right to use this content in whole or part in future works (such as articles or books)

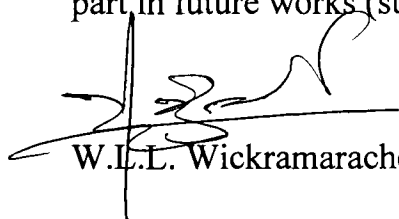


W.L.L. Wickramarachchi


16th December, 2011

The above candidate has carried out research for the Masters Dissertation under our supervision.

Dr. A.M. Harsha. S. Abeykoon



Dr. V.P.C. Dasanayake

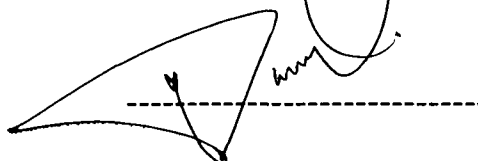

ABSTRACT

Empty container handling operations in inland container depots is a major economic and environmental problem today due to fossil fuel burning. This research examines reuse of braking and reverse energy to reduce fuel cost and environmental impact. The research was originated within the domain of electrical regeneration means as most of the known regeneration applications are electrical energy related. However regeneration by means of hydraulic energy was selected as Linde-II, base- equipment to the research is hydraulic based.

One major innovative step taken in this project is application of discharge pressure of the accumulator to suction side of the gear pump. This is a novel concept which have not patented yet anywhere in the world. The energy saving potential of the proposed reengineering solution is estimated to be 33%. Saving potential of the solution is substantial and lucrative. Simulation results were used to validate the reengineering solution in terms of power reduction. Actual fuel consumption of the proposed solution may defend on the way engine is controlled. Simplicity and low capital cost are two positive aspects of the solution. Even though the saving potential was impressive, it could not be implemented into a prototype mainly due to non availability of suitable gear pumps. Therefore solution is limited to a concept for this moment.

It is essential to have a positive engine control with respect to accumulator action in order to obtain optimum possible fuel savings. Whilst the accumulator is charging and discharging, there is an effect on lifting and lowering speeds. Variations in lowering and lifting speeds due to the proposed solution could affect performance related to the users' needs, however it has not been considered within the scope of the research. Main research areas precede parallel to this study are: recovery of braking energy, development of an engine control algorithm, a study on variations of lifting and lowering speed, and a reliability assessment of the proposed reengineering solution.

This concept is novel and can be defined as a green supply chain initiative in which outcomes lead to a reduction of green house gas emissions, and also to reduce carbon footprint in the shipping industry.

ACKNOWLEDGEMENT

It is with deep gratitude I acknowledge the generous assistance, kind and valuable guidance of my supervisors Dr. Harsha Abeykoon of Department of Electrical Engineering and Dr. Palitha Dasanayake of Department of Mechanical Engineering University of Moratuwa in completing this study successfully.

I also wish to extend my sincere thanks to all the lecturers who thought me valuable lessons throughout the Master of Science course and all others at University of Moratuwa for their contributions and friendly support in the course of the study.

Further, I wish to extend my warm gratitude and thanks to the management and my engineering staff at Aitkenspace Logistics, who helped me to develop the reengineering solution for Linde-II, Empty Container Handler.

I specially thank my wife Dr. Dinusha Dahanayake and my parents for encouraging me towards successful completion of this research study.

Last but not the least I am grateful to Mr. Lilintha Lakmal and Mr. Amila Amarathunga of University of Moratuwa who lavishly shared their knowledge and expertise to simulate and analyze the solution and for all others who helped me in their own special way without which this would not have been a success.

TABLE OF CONTENTS

Declaration.....	iii
Abstract.....	iv
Acknowledgement	v
Table of contents.....	vi
List of figures.....	xii
List of tables.....	xiv
List of abbreviations	xv
1 Introduction	1
1.1 Overview	1
1.2 Empty container logistics operation.....	1
1.2.1 Container terminals.....	2
1.3 Energy embedded in container stack.....	2
1.4 Regeneration in the context of container handling	3
1.5 Outline.....	4
1.6 Container handling systems	5
1.6.1 Container crane	5
1.6.2 Rubber tyred gantry crane.....	5
1.6.3 Straddle carrier.....	6
1.6.4 Reach stacker	6
1.6.5 Mast mounted empty container handlers	6
1.7 Background	9
1.8 Limitations	9
1.9 Literature survey	9
1.10 Conceptual frame work	10
1.11 Methodology	10
1.12 Motivation.....	11
2 Problem statment.....	13
2.1 Introduction.....	13
2.2 Identification of the problem.....	13

2.3	Environmental and human impact	13
2.4	Impact of the oil price	15
2.5	Low fuel quality	15
2.6	Nature of the business	15
2.7	Application of regeneration concept for empty container handlers	15
2.8	Why this research is significant	16
2.9	Objective of the study	16
2.10	Importance of the study	17
2.11	Summary	18
3	Basics of Engining driven mast mounted empty container handlers	19
3.1	Introduction	19
3.2	Overview of the base-equipment	19
3.3	Identification of main systems of the base-equipment.....	20
3.3.1	Engine	20
3.3.2	Transmission unit.....	21
3.3.3	Drive axle.....	21
3.3.4	Rear axle of the truck.....	22
3.3.5	Hydraulic system	22
3.3.6	Main components of the lifting system.....	26
3.3.7	Directional Control Valves	29
3.3.8	Steering priority valve (E)	29
3.3.9	Locking blocks (J)	30
3.3.10	Main hydraulic pumps	30
4	Literature survey – I	31
4.1	Introduction	31
4.2	Electrical Vehicles	31
4.2.1	Would electrification of equipment be viable option?.....	31
4.2.2	Evolution of the concept of electrical vehicle	32
4.2.3	Battery electric vehicles.....	32
4.2.4	Engine powered electric vehicles	33
4.3	Hybrid vehicles	33

4.4	Use of fly wheels and capacitors for energy storage.....	35
4.5	Hybrid hydraulic	36
4.5.1	Hybrid drives in off-highway applications	38
4.6	Regenerative braking with hydraulic bladder accumulators	39
4.7	Hybrid concept.....	41
4.7.1	Main components of the Hybrid system	42
4.7.2	Delivering cycle analysis of the hybrid system	43
4.7.3	Fuel consumption.....	44
4.8	Summary	47
5	Litrature survey - II	48
5.1	Introduction.....	48
5.2	Basics of hydraulics	48
5.2.1	Continuity Equation.....	48
5.2.2	Reynolds Number	49
5.2.3	Relationship for motion of liquid along a stream line	50
5.2.4	Energy Losses	51
5.3	Hydraulic components	53
5.3.1	Rotary gear pump.....	53
5.3.2	Directional control Valves.....	54
5.3.3	Shuttle valve	55
5.3.4	Pressure control valves	55
5.3.5	Pressure reducing valves.....	56
5.3.6	Accumulators	56
5.3.7	Selection of Bladder Accumulators	61
5.3.8	Bladder Accumulator Sizing.....	61
5.4	Analysis of lifting circuit of working hydraulic system of Linde-II,	65
5.4.1	No function, directional control valves are set in neutral	65
5.4.2	Lifting Function	67
5.4.3	Lowering Function.....	68
5.5	Summary	69
6	Conceptual framework	71

6.1	Introduction	71
6.2	Energy flow	71
6.3	Reuse of braking energy of the equipment	72
6.4	Possible ways of storing of energy.....	73
6.5	Possible ways of capturing of energy.....	74
6.6	Illustration of possibilities and solutions.....	74
6.7	First Concept based on electrical energy	77
6.7.1	First candidate solutions of the first concept	78
6.7.2	Second candidate solutions of thee first concept	78
6.8	Second concept based on hydraulic energy	79
6.8.1	Analysis of the first concept	80
6.8.2	Analysis of the second concept.....	81
6.9	Evaluation of concepts	83
6.10	Development of decision matrix	86
6.11	Summary	88
7	Methodology.....	90
7.1	Introduction	90
7.2	Conceptual frame work	90
7.3	User Needs	91
7.4	Engineers Perspectives.....	91
7.5	Identifying Alternatives	92
7.6	Development of hydraulic circuits	93
7.6.1	Problems	94
7.6.2	Evaluation of Alternatives	95
7.7	Development of alternative circuit.....	95
7.7.1	Sub problems and limitation	97
8	Solution analysis.....	99
8.1	Introduction	99
8.2	Problem Definition.....	99
8.3	Calculation	99
8.3.1	Actual System	100

8.3.1.2	Calculating the discharge pressure of the pump	101
8.3.2	Calculation of the pump power.....	103
8.3.3	Proposed system	105
8.3.4	Energy Saving.....	109
8.4	Summary	110
9	Modeling.....	112
9.1	Introduction	112
9.2	Rearranging the existing circuit	112
9.3	Modeling	113
9.3.1	Limitations and importance of modeling.....	114
9.3.2	Available modeling software	114
9.4	Modeling of existing circuit.....	116
9.5	Assumptions, Simplifications and System parameters	118
9.6	Plotting of results	119
9.6.1	Simulation of pump torque and shaft velocity of the pump	119
9.6.2	Simulation of lifting and lowering speeds of Linde-II	122
9.6.3	Determination of pressures	123
9.7	Modeling of proposed reengineering solution	124
9.8	Comparison of simulation results.....	128
10	Conclusion	130
10.1	General Overview	130
10.2	Problems encountered in reengineering of Linde-II	130
10.3	Innovative approach.....	131
10.4	Outcome of the reengineering solution	131
10.5	Future study and limitations.....	132
10.5.1	Engine control algorithm for the solution.....	133
10.5.2	Lifting and lowering speed controlling algorithm	133
10.5.3	Assessment of reliability and safety of the equipment	134
10.5.4	Pump development	134
10.6	Drawbacks of the reengineering solution.....	135
10.7	Achievements and Positive Aspects.....	135

References.....	137
A Appendix A	140
A.1 Electrical motors	140
A.1.1 Controlling of the motors.....	141
A.2 Types of Motors	141
A.3 DC motor efficiency.....	142
A.4 Motor losses and motor size.....	143
A.5 Tapping braking energy of electric motors	144
A.6 Limitation of DC brushed motors	145
A.7 Brushless DC motors.....	145
A.8 Switched reluctance motors	146
A.9 The induction motor	147
A.10 Ways of improving motor efficiency	148
A.11 Motor mass	148
A.12 Selection of electrical machines for hybrid applications.....	149
A.12.1 Use of battery as a source of energy	150
A.12.2 Energy in a capacitor	151
B Appendix B.....	152
B.1 Engine Performance Curves.....	152
B.1.1 20 ft Containers.....	153
B.1.2 40ft.....	157
B.1.3 Reefer.....	160

LIST OF FIGURES

	Page
Figure 3.1: LINDE C80/6 Empty Container Handler [17]	19
Figure 3.2: Power flow components of the equipment [17].	20
Figure 3.3: Power transmission unit [17].....	21
Figure 3.4: Steering axle [17]	22
Figure 3.5 : Simplified schematic diagram of the hydraulic system	23
Figure 3.6 : Lift cylinders [17].....	27
Figure 3.7: Exploded view of the mast [17]	28
Figure 3.8: Spreader [17]	28
Figure 3.9: Directional Control Valves [17].....	29
Figure 3.10: Steering priority valve [17]	30
Figure 4.1: Rechargeable battery electric vehicle [11]	33
Figure 4.2: Series hybrid vehicle layout [11]	34
Figure 4.3: Parallel hybrid vehicle layout [11]	35
Figure 4.4: Hybrid hydraulic layout; source: Eaton Hydraulics [22]	37
Figure 4.5: Commercial application of hydraulic hybrid [22].....	37
Figure 4.6: Volvo L220F Hybrid wheel loader [25].....	39
Figure 4.7: Rexroth hydrostatic regenerative braking system [29]	40
Figure 4.8: Fuel cell hybrid fork lift [28].....	40
Figure 4.9: Comparison of electric and hydraulic hybrid systems [29].....	41
Figure 4.10: Main components of hydrid system [29].....	43
Figure 4.11: Comparison of energy balance of conventional and hydrid system [29]	44
Figure 4.12: Comparison of fuel consumption [29]	45
Figure 4.13: Efficiency map for the engine [29]	45
Figure 4.14: Comparison of CO2 emissions at NEDC [29]	46
Figure 5.1: Moody Chart [32].....	52
Figure 5.2: Bladder Accumulator Sizing [34]	62
Figure 5.3: Correction factors for change of state [34].....	64
Figure 6.1: Energy flow across the lifting system	71
Figure 6.2: Block diagram of the energy flow across the system.....	72
Figure 6.3: Elements of first concept, first sub candidate solutions.....	77
Figure 6.4: Elements of first concept, second sub candidate solution.....	78
Figure 6.5: Elements of second concept, first sub candidate solution.....	79
Figure 6.6: Elements of second concept, second sub candidate solution	80
Figure 6.7: Block presentation of energy flow of first concept.....	81
Figure 6.8: Block presentation of energy flow of second concept	82
Figure 7.1: First candidate hydraulic circuit.....	94

Figure 7.2: Alternative hydraulic circuit.....	96
Figure 8.1: Lifting mechanism of Linde-II.....	100
Figure 8.2: Engine plot for lifting of 20ft empty container	104
Figure 8.3: Proposed hydraulic circuit for lifting system.	105
Figure 8.4: Bladder Accumulator Sizing [34]	107
Figure 8.5: Correction factors for adiabatic change of state [34]	109
Figure A.1: Torque/ Speed graph for a brushed DC motor [21].....	140
Figure A.2: Graph of data from a real 250 kW fuel cell used for a bus	145
Figure A.3: Typical torque/ speed curve for an induction motor [21].....	147
Figure A.4:- Specific powers of electric motors [11]	149
Figure B.1: Test results for lowering of 20ft container	153
Figure B.2 : Test results for lifting attempt top of 20ft container.....	153
Figure B.3: Test results for lifting beginning of 20ft container.....	154
Figure B.4: Test results for while lifting of 20ft container.....	154
Figure B.5: Test results for while lifting of 20ft container.....	155
Figure B.6 : Test results of beginning of lifting of the second 20ft container.....	156
Figure B.7: Test results for lowering of 40ft container	157
Figure B.8: Test results of beginning of lifting of 40ft container.....	157
Figure B.9 : Test results for while lifting of 40ft container.....	158
Figure B.10: Test results for while lifting of 40ft container.....	158
Figure B.11: Test results for lift stop of 40ft container	159
Figure B.12: Test results for lowering of Reefer container	160
Figure B.13: Test results for lowering from the top position of Reefer container ..	161
Figure B.14: Test results for while lifting of Reefer container.....	162
Figure B.15: Test results for beginning of lifting of Reefer container	163
Figure B.16: Test results for beginning of lifting of second Reefer container	164
Figure B.17: Test results for beginning of lifting of second Reefer container	164
Figure B.18: Test results for while lifting of second Reefer container.....	165
Figure B.19: Test results for beginning of lifting of second Reefer container	166

LIST OF TABLES

	Page
Table 2: Emission Growth [8]	12
Table 3: Possibility -Solution Matrix.....	75
Table 4: Solution matrix	76
Table 5: Concept evaluation	84
Table 6: Decision matrix.....	87
Table 7: Comparison of various types of batteries [16].....	151

LIST OF ABBREVIATIONS

Abbreviation	Description
ACM	Alternative Current Motor
BLDC	Brushless DC motor
CO	Carbon Monoxide
CO ₂	Carbon Dioxide
CRPS	Common Pressure Rail system
CVT	Continuous Variable Transmission
DC	Direct Current Motors
ECH	Empty Container Handlers
ECM	Engine Control Module
ECM	Electronically Commutated Motor
GSC	Green Supply Chains
HBRs	Hydrostatic Regenerative Braking System
HLA	Hydraulic Launch Assist
ICE	Internal Combustion Engines
IFAS	German Institute for Fluid Power Drives and Controls
IVT	Infinitely Variable Transmission
NEDC	New European Drive Cycle
N ₂ O	Nitrous Oxides
PM	Particulate Matter
RS	Reach Stackers
RTG	Rubber Tyred Gentries
SR	Switched Reluctance

SC	Straddle Carriers
SSC	Ship to Shore Cranes
TEU's	Twenty feet Equivalent Units
VOCs	Volatile Organic Compounds